

8 7 6 5 4 3 2 1


NOTICE - PROPRIETARY INFORMATION
THE DESIGN AND RELATED INFORMATION CONTAINED HEREIN
IS THE SOLE PROPERTY OF COFAN USA INC. THE DISCLOSURE
OF THIS INFORMATION DOES NOT CONSTITUTE THE RELEASE OF
ANY PROPRIETARY RIGHTS THEREIN. PERMISSION TO REPRODUCE
THIS INFORMATION OR THE PRODUCTS DISCLOSED HEREIN
MUST BE OBTAINED IN WRITING FROM COFAN USA INC.

REVISION HISTORY					
REV	DESCRIPTION	DRWN	CHK'D	APPVD	DATE
01	INITIAL RELEASE	Fred	-	-	2014-11-08

- NOTES:
1. MATERIAL: AL6063-T5 (ELECTRIC CONDUCTIVITY $\geq 50\%$ IACS, HARDNESS HW 11°-13°)
2. FINISH: N/A
3. DEBURR AND BREAK ALL SHARP EDGES..
4. $\triangle$ IS CRITICAL INSPECTION POINT. NUMBERING IN TRIANGLE IS TO BE USED FOR CROSS REFERENCE OF INSPECTION REPORT TO DRAWING DIMENSION OR FEATURE.
5. ALL DIMENSIONS TO INCLUDE APPLICABLE FINISH.
6. EXTRUSION AREA: 898.25MM²
EXTRUSION WEIGHT: 2425.28G/M,
CUTTING LENGHT: 1056MM, 2561.1G
7. EXTRUSION MOULD PN: 18.01.01139.

未注尺寸公差依照一般公差

范 围	公差值
0-6mm	±0.10
≥6-20mm	±0.15
≥20-50mm	±0.20
≥50-100mm	±0.30
≥100-150mm	±0.40
≥150-200mm	±0.50
≥200-250mm	±0.65
≥250-300mm	±0.8
300mm以上	±1

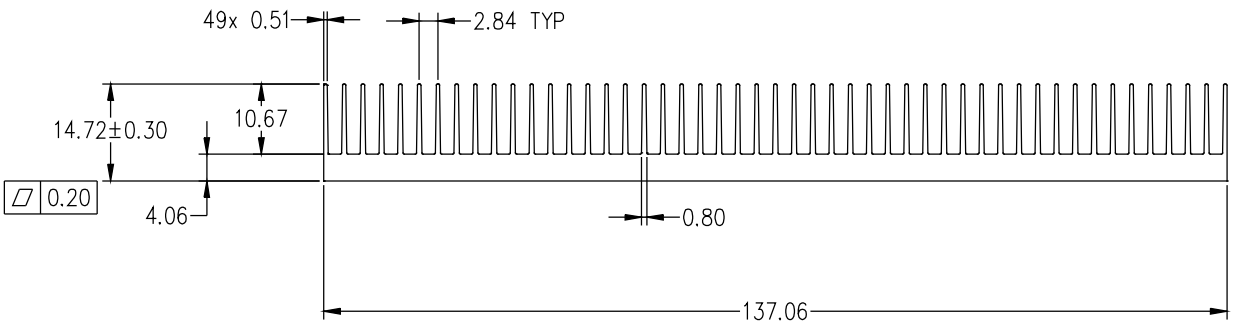

RoHS2
COMPLIANT
2011/65/EU

DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRE TOLERANCES ARE: 1 PLACE .X ± 2 PLACE .XX ± 3 PLACE .XXX ± ANGLES EXCEPT 90° ± 1° MAXIMUM SURFACE ROUGHNESS 3.2 $\sqrt{\text{ }}$	MATERIAL: See Note	CUSTOMER PART NUMBER: --	COFAN USA 48664 MILMONT DRIVE, FREMONT, CA 94538		
	DRAWN BY: Fred	COFAN_USA PART NUMBER: 20-9292-EXT	NAME: HEAT SINK		
	CHECKED BY:	COFAN_CHINA PART NUMBER: 21.01.00488	SCALE: 1:1	CUS REV: --	COF REV: 01
	APPR BY:	UNIT: mm	SHEET: 1 OF 1	DATE DRAWN: Nov-08-2014	