

NOTES:

1. MATERIAL: AL6063-T5
2. FINISH: .
3. DEBURR AND BREAK ALL SHARP EDGES
4.  IS CRITICAL INSPECTION POINT. NO CROSS REFERENCE OF INSPECTION REQUIRED
5. ALL DIMENSIONS TO INCLUDE APPLICABLE TOLERANCES
6. Section Area: 113.8mm², 0.31kg/M
Cutting length: 1300mm for LP-PRH-D.
7. EXTRUSION MOULD PN#: 18.01.xxxx

REVISION HISTORY					
REV	DESCRIPTION	DRWN	CHK'D	APP'VD	DATE
01	INITIAL RELEASE	JunW	-	-	10/04/2018

□ MATERIAL: AL6063-T5

2. FINISH: .

3. DEBURR AND BREAK ALL SHARP EDGES..

4.  IS CRITICAL INSPECTION POINT. NUMBERING IN TRIANGLE IS TO BE USED FOR CROSS REFERENCE OF INSPECTION REPORT TO DRAWING DIMENSION OR FEATURE.

5. ALL DIMENSIONS TO INCLUDE APPLICABLE FINISH.


6. Section Area: 113.8mm², 0.31kg/M

Cutting length: 1300mm for LP-PRH-D.

7. EXTRUSION MOULD PN#: 18.01.xxxx

裁切长度1.3M

EXTRUSION TOLERANCES	
0-6mm	± 0.10
$\geq 6-20\text{mm}$	± 0.15
$\geq 20-50\text{mm}$	± 0.20
$\geq 50-100\text{mm}$	± 0.30
$\geq 100-150\text{mm}$	± 0.40
$\geq 150-200\text{mm}$	± 0.50
$\geq 200-250\text{mm}$	± 0.65
$\geq 250-300\text{mm}$	± 0.8
300mm以上	± 1

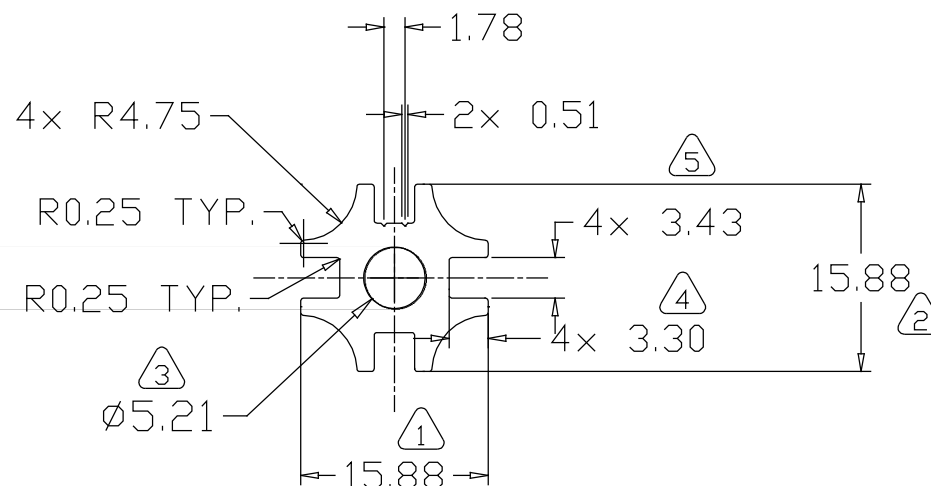

DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRE TOLERANCES ARE:

0 ~ 18	±
18 ~ 80	±
80 ~	+

ANGLES EXCEPT 90° $\pm 1^\circ$
MAXIMUM SURFACE ROUGHNESS 3.2 $\sqrt{\text{ }}$

5	MATERIAL:
---	-----------

See Note

DRAWN BY: JunW

CHECKED BY: _____

APPR BY: _____

CUSTOMER PART NUMBER:

LP-PRH-B

COFAN_USA PART NUMBER	----
-----------------------	------

NEW COFAN PART NUMBER	21.01.00734
-----------------------	-------------

UNIT:	SHEET:
-------	--------

 **COFAN USA**
48664 MILMONT DRIVE FREMONT, CA 94538

NAME:
Aluminum Profile, Back Extrusion

SCALE:	CUS REV:	COF REV:
1:1	-	01

	DATE DRAWN: Feb-04-2018
---	----------------------------

RoHS2
COMPLIANT
2011/65/EU